

Test Results: ___ single X combination ___ composite

Section I. Pre-test Conditions

For initial testing, a bundle of boxes were received in new condition. Boxes from the lot from which this box was taken have also been performance tested with a variety of bottles and cans. All fiberboard containers are conditioned to standard conditions (23°C, 50% RH) prior to testing.

The following identification schema designates the packaging specimen used for the test(s) indicated. Assignments were made at random, in no particular order of sequence.

| <u>Specimen No.</u> | <u>Test</u> |
|---------------------|-------------------------------------|
| B | stack test |
| A | repetitive-shock vibration test |
| A | flat onto bottom, drop test (3) |
| | flat onto top, drop test (1) |
| | flat onto long side, drop test (4) |
| | flat onto short side, drop test (6) |
| | bottom corner, drop test (2-3-5) |
| C | water resistance test |

Section II. Summary

| | |
|---|-------------|
| A. Drop test - 106.3" | PASS |
| B. Leakproofness test | N/A |
| C. Internal pressure test/Hydrostatic pressure test | N/A |
| D. Stacking test - Static load, 550 lbs., 24 hrs. | PASS |
| E. Vibration standard - Repetitive-shock, rotary motion 2.0 Hz., 1 hr. | PASS |
| F. Water resistance test - V3c, Felt side | PASS |
| G. Compatibility test | N/A |

Note: To be certifiable, the configuration must pass the applicable tests for the type packaging, intended lading, and mode(s) of shipment. This report is not applicable to transportation by air.

Test Results (continued)

Section III. Discussion

- A. Drop test:** 49 CFR §178.603 **Test date(s):** 4/14/04
 ___ cold conditioned (0° F, 72 hr)
 ___ ambient conditions (~68° F & 40% RH)
X standard conditions (50% RH & 23° C)

| No | Ht. | Orientation | Results |
|----|--------|---------------------------------------|--|
| A | 106.3" | Flat onto box bottom | Pass/No leaks/rupture; entire contents retained |
| A | 106.3" | Flat onto box top | Pass/No leaks/rupture; entire contents retained |
| A | 106.3" | Flat onto box long side | Pass/No leaks/rupture; entire contents retained |
| A | 106.3" | Flat onto box short side | Pass/No leaks/rupture; entire contents retained |
| A | 106.3" | Diagonally onto bottom corner (2-3-5) | Pass/No leaks/rupture; minor crushing of the 2-3-5 corner; contents retained completely within the box |

The specimen was a combination packaging consisting of a grade V3c fiberboard box (outer packaging) containing an inner packaging (one, 2½-liter glass bottle). The glass bottle was filled with water to 98% of maximum capacity (based on weight).

In conducting the drop test, all five drops (flat bottom, flat top, flat long side, flat short side, and bottom corner) were performed on the same configuration. Five drops per configuration exceeds 49 CFR §178.603 requirements, as well as both UN and ASTM recommendations (i.e., one drop on a side or corner per box). The use of one configuration for multiple tests and drops is DOD policy as stated in DLAD 4145.41/AR 700-143/AFJI 24-201/NAVSUPINST 4030.55A/MCO 4030.40A, Packaging of Hazardous Material. Also per this policy, any failed orientation(s) can be repeated using another configuration.

- B. Leakproofness test:** 49 CFR §178.604
 N/A. The leakproofness test was not conducted on the box, because the packaging is not intended for the containment of liquids.
- C. Internal Pressure/Hydrostatic Pressure test:** 49 CFR §178.605
 N/A. Testing for the maintenance of internal pressure is not required for this configuration.

Test Results: Section III (continued).

D. Stacking test: 49 CFR §178.606 **Test date(s):** 4/13/04
 standard conditions (23° C & 50% RH)
 ambient conditions (~70°F & 32% RH)
 high temperature conditions (104° F)

| No. | Length | Type | Load/Force Required | Peak Force | Results | Stability Maintained? |
|-----|--------|--------|---------------------|------------|---------|-----------------------|
| B | 24 hrs | Static | 310 lb | 572 lbf | Pass | Yes |

The static top load of 550 lbs was established for the stack test, because it could hold the load constant for the required 24-hours timeframe. The total top load applied on the empty box was greater than the minimum required for one box based on the outside box height and the gross packaged weight. The top load was to simulate a stack of identical packagings that might be stacked on the packaging during transport.

E. Vibration test: See 49 CFR §178.608. **Test date(s):** 4/14/04
 ambient conditions (~68° F & 40% RH)

| No. | Frequency | Duration | Results |
|-----|-----------|----------|--------------------------------------|
| A | 2.0 Hz | 1 hr | Pass. No leakage, rupture, or damage |

To be in compliance with U.S. Department of Transportation standards for packagings bearing the United States mark (USA) as a component of the packaging certification marking (49 CFR §173.24a(a)(5)), the vibration test was performed, as a means to determine capability. The test was conducted as prescribed by ASTM D 999, method A2 (Repetitive Shock Test (Rotary Motion)). The packaging was tested using a 1,250-lbs vibration table (rotary motion) that had a 1-inch vertical double amplitude (peak-to-peak displacement) such that the packaging was raised from the platform to such a degree that a piece of steel strapping (1.6 mm) could be passed between the bottom of the package and the platform.

F. Water resistance (Cobb Method) test (fiberboard): 49 CFR §178.516. As required by the standards for fiberboard boxes, the Cobb Method Test for water absorptiveness was performed on specimen "B" cut from one box (DLA04-F049). **Test date(s):** 4/09/04

No. specimens felt side (exterior) 10. Average 113 g/m². Highest exterior value was 130 g/m². Lowest exterior value was 107 g/m². All of the samples tested were free of printing.

No. specimens exceeding 155 g/m² 0.

The shipper must take appropriate steps to ensure that the box is correctly constructed with the felt side on the outside.

Test Results: Section III (continued)

G. Compatibility test (plastics packagings only): N/A.

Test Personnel

The following personnel performed the aforementioned testing, or had a role in the testing, evaluation, and/or documentation, as reported herein-- Richard D. LaFave, Stuart N. Crouse, Timothy L. Reimann, and Lynn Hill.

References

A. Title 49 Code of Federal Regulations, Parts 106-180,
current as of 1 Oct 2003

B. International Air Transport Association Dangerous Goods Regulations, 45th edition, 2004

C. ASTM D 4919, Specification for Testing of Hazardous Materials Packagings.

D. ASTM D 999, Standard Method for Vibration Testing of Shipping Containers.

E. ASTM D 951, Standard Test Method Water Resistance of Shipping Containers by Spray Method.

F. TAPPI Standard: T 441 Water Absorptiveness of Sized (Non-Bibulous) Paper and Paperboard (Cobb Test).

G. Recommendations on the Transport of Dangerous Goods, Thirteenth revised edition, United Nations, New York, 2003.

H. DLAD 4145.41/AR 700-143/AFJI 24-201/NAVSUPINST 4030.55A/MCO 4030.40A, Packaging of Hazardous Material, 23 Jul 96.

I. AFMAN 24-204/TM 38-250/NAVSUP PUB 505/MCO P4030.19G/DLAI4145.3, Preparing Hazardous Materials for Military Air Shipments, 11 Dec 01.

Test Results: Section III (continued)

Equipment

| Item | Manufacturer | Serial No. | Calibration Expiration Date |
|------------------------------|--------------------------------------|-----------------------|--|
| 1,250-lb vibration table | L.A.B Skaneateles, NY | 8120179 | see note |
| 11,000-lb compression tester | Chant Engr. Co. New Britain, PA | 001 | (new) |
| 500-lb scale | Ohaus Corporation USA | 5097971 | 4/04 |
| 3,000-gram balance | Brinkman Instruments Westbury, NY | 3103120 | 4/04 |
| 9,000-gram balance | Ohaus Corporation USA | 20078 | 4/04 |
| Release hook | Lansmont Monterey, CA | N/A | N/R |
| Cobb Sizing Tester | Teledyne Curley Troy, NY | 4180-A | N/R |

Note. Equipment is calibrated in accordance with International Safe Transit Association test equipment verification requirements, ANSI/ISO 17025 (General Requirements for the Competence of Testing and Calibration Laboratories) and TB 43180 (Calibration and Repair Requirements for the Maintenance of Army Materiel).

Test Applicability

Pass/fail conclusions were based on the particular fiberboard box specimens, test loads, and the limited quantities submitted for test. Extrapolation to other materials, other manufacturers, other applications, different inner packagings, container sizes, or lesser inner quantities is the responsibility of the packaging design agency or applicable higher headquarters. Extrapolation of test results based on less than the minimum recommended number of test specimens is also the responsibility of the packaging design agency or applicable higher headquarters.

Testing was performed per *Title 49* Code of Federal Regulations.

Performance testing was undertaken and completed at the request of an agency responsible for shipment of the dangerous good(s). The completion of successful required performance tests does not, by itself, authorize the marking and transportation of the dangerous good(s). Applicable modal regulations should be consulted concerning the relationship of performance testing completed and the dangerous good(s).

The required performance tests are intended to evaluate the performance of the packaging components. The criteria used to evaluate packaging performance is whether the contents of the packaging are retained within the outer packaging, should damage to the outer packaging occur, and secondly, if any inner packaging of hazardous materials leaks, ruptures, or is damaged so as to affect transportation safety. The successful completion of the required tests does not ensure the undamaged delivery or survivability of the actual commodity/item. Separate testing is necessary to assure the stability of any explosive item.

Before a configuration can be certified by the person(s) authorizing shipment, the appropriate packaging for the particular hazardous materials and mode of transportation must be determined, and the item(s) must be prepared for shipment per applicable regulations. The chosen configuration must have been performance tested in accordance with the size, the shape, and the weight constraints posed by the configuration to be certified. The testing reported herein should not be construed as blanket certification of any configuration that simply uses the performance tested outer fiberboard box. Packaging paragraphs apply.

Test Data Sheet

Section I. Test Product

Physical State: ___ solid X liquid ___ gas ___ aerosol

Name: Water

Amount Per Container (Configuration):
2½-liter, rated; 2.3 lbs.; 5.35 lbs, filled

Gross Weight: 31.00 lbs

Section II. Test Parameters

Drop Height: Ref: 49 CFR §178.603

___ 1.8 m; 71 in. (PG I, II, & III, SG ≤1.2 or solids)

___ 1.2 m; 47 in. (PG II & III, SG ≤1.2 or solids)

___ 0.8 m; 32 in. (PG III, SG ≤1.2 or solids)

X from-- 106.3 in. PG I: 1.8 (SG) x 1.5 m x 39.37 in./m

_____ PG II: SG x 1.0 m x 39.37 in./m

_____ PG III: SG x 0.67 m x 26.38 in./m

Stacking Weight Formula- DLA COMBINATION PACKAGINGS

| Variables | Inputs | Calculations |
|-----------------------------------|------------|--------------|
| h height, drum/box | 16.75 | |
| n # stacked containers | XXXXXXXXXX | 7.00 |
| w1 weight, drum/box | 2.27 | 2.27 |
| w2 weight, bottle/can | 7.62 | 7.62 |
| w3 weight, ring/pad | 0 | 0.00 |
| q1 # inner containers | 1 | 1.00 |
| v1 max. volume, 1 inner container | 0.625 | 0.63 |
| v total volume | XXXXXXXXXX | 0.63 |
| w4 weight, item (unpacked) | 0 | 0.00 |
| W5 weight, absorbent | 21 | 21.00 |
| W gross weight | XXXXXXXXXX | 30.89 |
| C constant | 1 | |
| Sg specific gravity | 1.8 | 1.80 |
| PG packing group | 1 | XXXXXXXXXX |

NOTE: A1 = (n-1)*(w+(1.8*v*8.3*0.98))*(c), Packing Group I
 A2 = (n-1)*(w+(2.7*v*8.3*0.98))*(c), Packing Group II
 A3 = (n-1)*(w+(4.0*v*8.3*0.98))*(c), Packing Group III

A1 = stacking weight in pounds, PG I

A2 = stacking weight in pounds, PG II

A3 = stacking weight in pounds, PG III

n = (118/h), minimum number of containers that when stacked, reach a height of 3 m

w = w1+(w2*q1)*(w3*q1)*w5, total weight in pounds

v = v1*q1, total volume

C = either 1.5 (the compensation factor that converts the static load of the stacking test into a load suitable for dynamic compression testing), or 1.0 (static top load)

| | | | |
|---------------------------|------------|---------------|------------|
| A1 Stacking weight-PG I | XXXXXXXXXX | 240.70 | 241 |
| A2 Stacking weight-PG II | XXXXXXXXXX | 268.40 | 269 |
| A3 Stacking weight-PG III | XXXXXXXXXX | 309.90 | 310 |

B-1

RN: DLA04-F049

Appendix B (Continued)

Section III. Equivalencies of Liquids

| | Specific Gravity ¹ | Total (Each) Amount per Packaging | Gross Weight (pounds) (kilograms) | |
|--------|-------------------------------|-----------------------------------|-----------------------------------|------|
| water* | 1.0 | 5.47 lb | 31.00 | 14.1 |
| PG I | 1.8 | 9.85 lb | 35.38 | 16.1 |
| PG II | 2.7 | 14.77 lb | 40.30 | 18.3 |
| PG III | 4.0 | 21.88 lb | 47.41 | 21.6 |

Note 1. Equivalent specific gravity derived from drop height as follows-- PG factor x density (or SG) = drop height, thus

SG = drop height/PG factor (49 CFR §178.603)

PG I: 1.5 m x SG = 2.7 m, thus SG = 1.8

PG II: 1.0 m x SG = 2.7 m, thus SG = 2.7

PG III: 0.67 m x SG = 2.7 m, thus SG = 4.0

Unless otherwise computed for more dense liquids, water (SG = 1) represents a solution having a specific gravity of 1.2 or less.

Packaging Data Sheet

Section I. Exterior Shipping Container

Packaging Category: ___ single X combination ___ composite

UN Type: Fiberboard boxes (49 CFR §178.516) UN Code: 4G

Specification No.: ASTM-D5118; CF; V3c; WR; SW; Style RSC; 2.3 lbs.;
12" x 12" x 16"(ID); 12.5" x 12.5" x 16.75"(OD) Bursting Strength-400

Manufacturer: Lynchburg Sheltered Industries, Lynchburg, VA 24501

Date(s) of Manufacture: October 2003

Closure Method: The fiberboard box was sealed (7 strip method) using
2" A-A-1830 clear tape. (See drawing)

Additional Description:

a. A 30 x 36 inch, 4-Mil-polyethylene liner was first placed in the fiberboard box for the purpose of encapsulating the absorbent and the test product. Approximately 1¾ inches of loose-fill absorbent cushioning was firmly packed in the bottom of the fiberboard box. The individually bagged bottle was placed on the absorbent material, and additional loose-fill absorbent material was then packed around and over the bottle. The loose fill absorbent material must be firmly compressed in approximately every 4 inches until box top is reached. Void space is not acceptable. Twist and tape plastic bag with 2" plastic tape. Embed the foam pad on top of the sealed box liner prior to closing the fiberboard box.

NOTE: It is critical that the full amount of absorbent is used.

b. For this configuration, either firmly packed, fine grade vermiculite or either of the following, firmly-packed cellulose fiber absorbent products, "HAZMATPAC® Absorbent A-900" or "Absorption Corporation Absorbent GP", can be used without any notable difference in performance. Inner packagings have a tendency to migrate if the loose fill material is not firmly packed, especially along the bottom of the container.

c. The quantities of absorbent material do meet the 2½-liter guidelines for absorbent materials as outlined in AFMAN 24-204/TM 38-250/NAVSUP PUB 505/MCO P4030.19F/DLAM 4145.3, Preparing Hazardous Materials for Military Air Shipments.

Absorbent Manufacturer: HAZMAT PAC A-900

Appendix C (Continued)

Section II. Inner Packaging/Article

Quantity of Inner Containers: 1

Capacity: 2½-liter (80 oz.)

Specification Type and No(s): N/A

Type/Materials: Round, flint glass, screw-cap bottle with handle

Manufacturer/Distributor: Scientific Specialties Service,
Hanover, MD 21076

Manufacturer's/Distributor's Part No(s): F73580

Tare Weight (empty bottle): 2.15 lbs

Filled Weight: 7.62 lb

Dimensions: 12 in. high; 5½ in. diameter

Closure Type: Plastic screw cap, 1½" diameter x 1"

Inner Closure: Filament-reinforced tape (1 pc)

Inner Secondary Closure: 24 x 30 x .004 in., flat polyethylene bag

Intermediate Packaging: 30 x 36 x .004 in., flat polyethylene bag

Cushioning: Absorbent GP or A900; weight - 22 lbs.
Vermiculite; weight - 11 lbs.
Polyethylene foam pad - 10 x 10 x 1 in., 2 lbs/cu.ft. density

Manufacturer/Distributor: HAZMATPAC A-900, HAZMATPAC Inc.; Absorbent GP, Absorption Corp.; and vermiculite, fine grain, Palmetto Vermiculite Company, Inc.

Closure Type: 2 inch, ASTM D-5486, Type II, NSN: 7510-00-266-6715

Appendix D

Rationale

The equivalent of Packing Group I (great danger) testing was requested for a 12- by 12- by 16-inch corrugated fiberboard box having as the intended contents one, 2½-liter, round, glass bottle, with screw cap.


The configuration to be tested is intended to be applicable to a large assortment of liquid products contained in round glass bottles, in volumes of 2½-liter or less. For lesser volumes, variations to testing requirements can be found in 49 CFR §178.601(g).

Water was used as the test liquid as permitted by Title 49 Code of Federal Regulations (CFR). Substitution for the actual hazardous lading is permitted by 49 CFR §178.602(c).

An inner closure utilizing filament-reinforced tape around the cap and neck of the bottle was used in accordance with accepted packaging practice.

One combination packaging made to the above described configuration was subjected to drop and vibration testing as prescribed in ASTM D 4919. These tests are designed to simulate the shock and vibration a package (configuration) may encounter when being shipped worldwide by truck, rail, or ocean going transport. The order of testing was vibration, then drop testing. Prior to the rough handling testing of the packed box, static loading was performed on an empty box. This is a U.S. DOT approved method of stack testing, especially when the combination packaging has wide applications. A separate box was used for water absorptiveness testing of the fiberboard.

Appendix D (Continued)

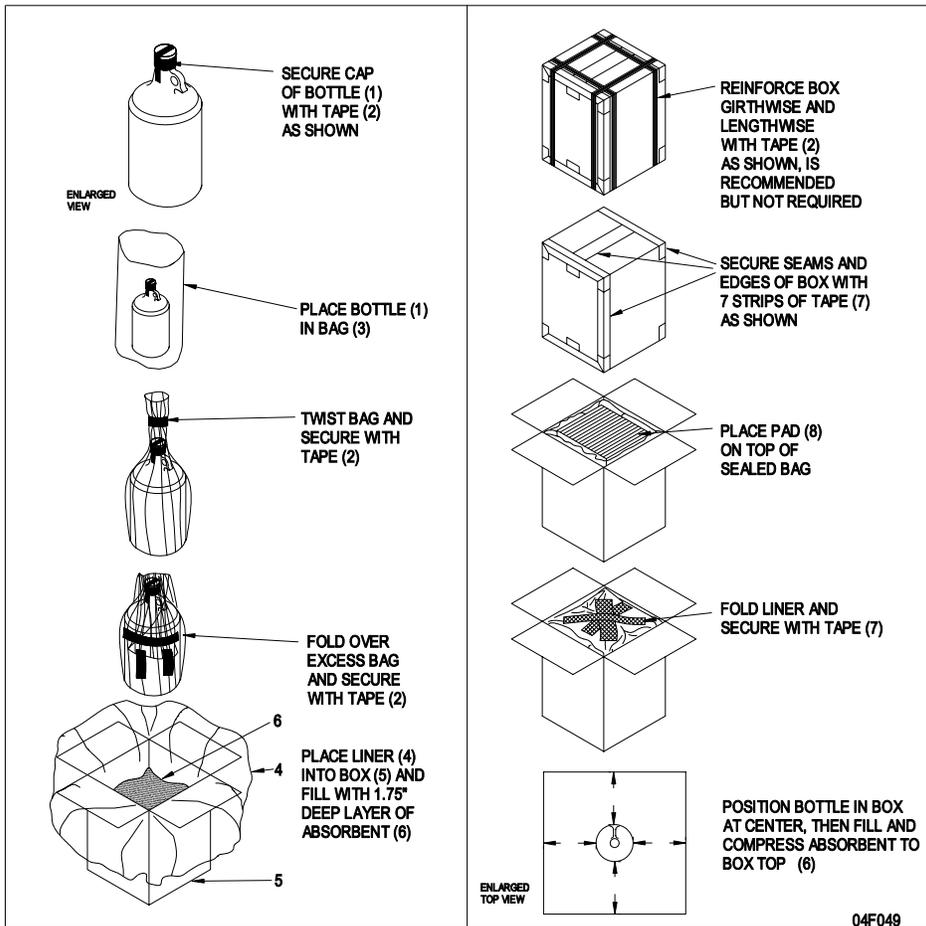

| ITEM | DESCRIPTION |
|------|---|
| 1 | 2-1/2 (80oz) - LITER, GLASS, ROUND, SCREW CAP BOTTLE WITH HANDLE, QTY. 1 |
| 2 | 1-INCH WIDE, PRESSURE-SENSITIVE TAPE, FILAMENT-REINFORCED, IAW ASTM D5330, TY II |
| 3 | PLASTIC BAG, 4-MIL POLYETHYLENE, 24 X 30 |
| 4 | PLASTIC BAG, 4-MIL POLYETHYLENE, 30 X 36 BOX LINER |
| 5 | FIBERBOARD BOX, ASTM D5118, STYLE RSC, GRADE V3c, NSN: 8115-00-418-4653, 12x12x16 IN. |
| 6 | CELLULOSE FIBER ABSORBENT, OR VERMICULITE, A-A-52450 |
| 7 | 2-INCH WIDE, PRESSURE-SENSITIVE TAPE, IAW ASTM D 5486, TY II, NSN: 7510-00-266-6715 |
| 8 | FOAM PAD, 2 LB/CU.FT., POLYETHYLENE, 10 X 10 X 1 IN. |

Appendix D (Continued)



Inner Packaging: 2½-liter, round, flint glass bottle with handle.

Appendix D (Continued)



Inner Packaging (bottle) closed in Inner Secondary Closure (plastic bag).

Appendix D (Continued)



Inner Packaging positioned with Intermediate Packaging (absorbent and box liner) and outer container.

Appendix D (Continued)



Intermediate Packaging closed.

Appendix D (Continued)



Intermediate Packaging closed with foam pad embedded.

Appendix D (Continued)

Results:



Closed outer container (fiberboard box).