



Place lid on loaded box and nail closed with 8d cement-coated sinkers.

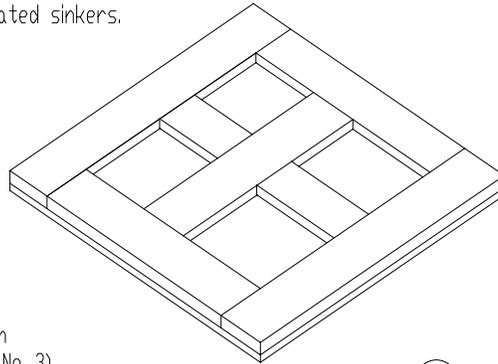

Twist shut inner liner and secure with strip of fiber reinforced tape (Item No. 3).
Or fold down and tape closed.

Nail lid in place and apply steel strapping girthwise in locations shown IAW ASTM D 6251, S2.2

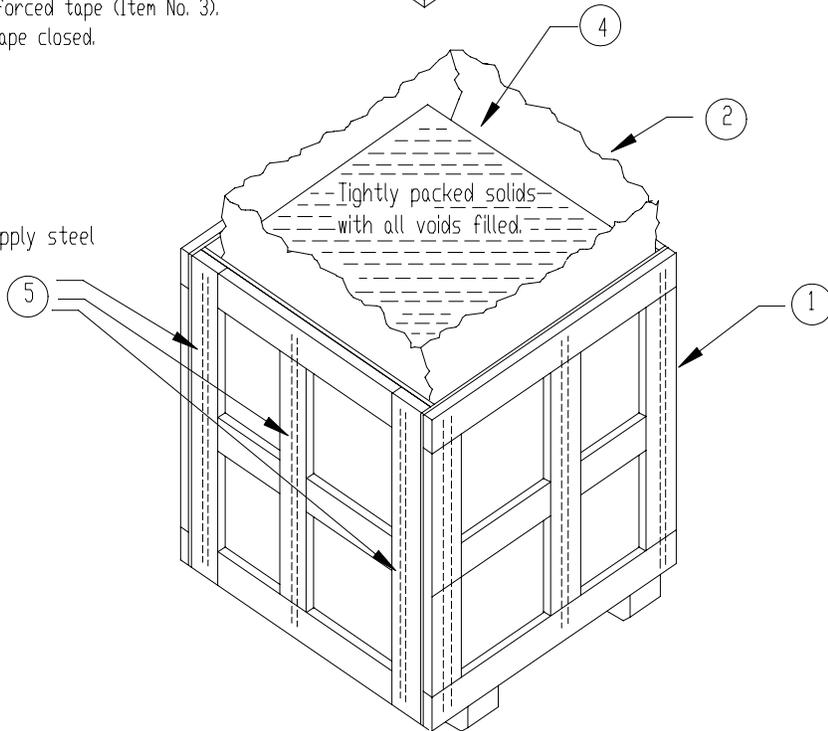

Item	Qty	Description	Notes
5	A/R	3/4-in. Flat Steel Strapping	ASTM D 3953, Type I, Class A or B
4	A/R	Tightly packed solids	
3	A/R	Fiber Reinforced Tape, 1-inch width	NSN 7510-00-582-4772
2	1	6-mil Poly Bag, 40 in. x 36 in. x 90 in.	Hazmatpac Stock No. B-790AS
1	1	38 in. x 38 in. x 38 in. Cleated Wood Box w/ Skids	ASTM D 6251, Style A1, Type III, Cl 2

File: DLAW005-04.DWG	AFPTEF Air Force Packaging Technology and Engineering Facility	Note: Follow All Instructions in TR
Dwg No: DLAW00504D		Dimensions in Inches
Engineer: Evans		Scale: NONE
	DATE: 25 August 04	PAGE 1 OF 1